

# BLACKLINE 1110-1620 FA FEEDER 800/500 HIGH SPEED

FULLY AUTOMATIC SHEET TO SHEET LAMINATING/MOUNTING MACHINE



The Lamina FA Blackline is a highly accurate high speed sheet to sheet fully automatic laminating/mounting machine. The machine can handle most of the existing material in the market.




The compact construction makes the machine operator friendly with a very short set-up time. The modular construction allows easy upgrading and the anodised finish result in a hard wearing surface that stays attractive for years.

A number of options such as Single Face Feeder, Down Stacker, Flip-Flop, Pressure Belt etc. can be added whenever required.



# BLACKLINE 1110-1620 FA FEEDER 800/500 HIGH SPEED

FULLY AUTOMATIC SHEET TO SHEET LAMINATING/MOUNTING MACHINE

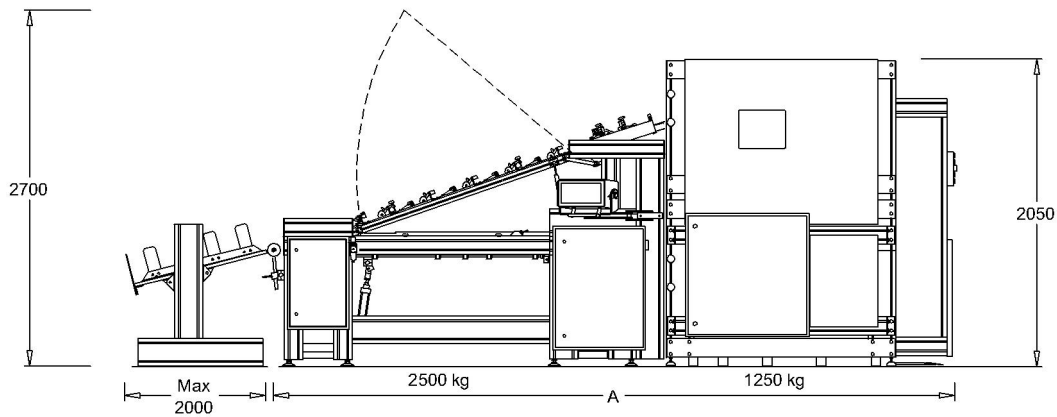

Size Range Model	Maximum Sheet Size		Minimum Sheet Size	
	Width	Length	Width	Length
1110	1100 mm (43")	1050 mm (41")	350 mm (13¾")	350 mm (13¾")
1116	1100 mm (43")	1600 mm (63")	350 mm (13¾")	350 mm (13¾")
1416	1400 mm (55")	1600 mm (63")	350 mm (13¾")	350 mm (13¾")
1420	1400 mm (55")	2000 mm (78")	350 mm (13¾")	350 mm (13¾")
1620	1600 mm (63")	2000 mm (78")	350 mm (13¾")	350 mm (13¾")

#### Machine Size (incl. Stacking table)

Model	Width	Length A	Weight
1110	2050 mm (80")	4750 mm (187")	3150 kg
1116	2050 mm (80")	5900 mm (232")	3750 kg
1416	2350 mm (92")	5900 mm (232")	3950 kg
1420	2350 mm (92")	6500 mm (256")	4050 kg
1620	2550 mm (100")	6500 mm (256")	4350 kg

Feeder Capacity	Top feeder: 500 mm (20") Bottom feeder: 800 mm (32")
Top Sheet	130 to 450 g/m <sup>2</sup> 1 pts = 28,25 g/m <sup>2</sup>
Bottom Sheet	From 250 g/m <sup>2</sup> to 10 mm (0,39") 1 pts = 28,25 g/m <sup>2</sup> corrugated from 0,6 - 10 mm (0,016" - 0,39")
Registration Accuracy*	Less than +/- 0,5 mm (+/- 0,02")
Total Installed Power	5,0 kW
Electrics	208 V, 3 phase, 60 cycle; or 400 V, 3 phase, neutral 50/60 cycle; or Specify
Air Requirements	6 bar; 80 psi; 34 CFM, Approximately 500 L/min

\* Depends on properties of materials being used and existing operating conditions.

**Note!** For more information and videos, please visit [www.laminasystem.com](http://www.laminasystem.com)



Head Office, Sweden: Lamina System AB

Vevgatan 21, 504 64 Borås, Sweden, Phone +46 33 23 34 00, Fax +46 33 23 34 10

Web: [www.laminasystem.com](http://www.laminasystem.com), e-mail: [sales.dept@laminasystem.com](mailto:sales.dept@laminasystem.com)